




**HAYNES**<sup>®</sup> **PRODUCT INFORMATION**

THE WORLD'S LEADING MANUFACTURER OF PREMIUM FOOD GRADE LUBRICANTS

# HAYNES HOMOGENIZER OIL

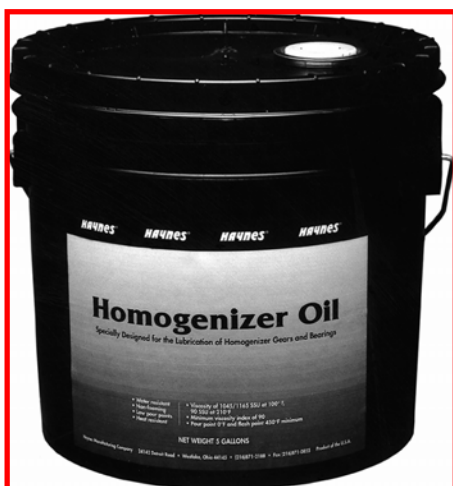

## SPECIFICATIONS:

- **VISCOSITY OF 1045/1165 SSU AT 100°F, 90 SSU AT 210°F**
- **MINIMUM VISCOSITY INDEX OF 90**
- **POUR POINT 0°F AND FLASH POINT 450°F MINIMUM**

*Packaged in 5 Gallon Pails and 55 Gallon Drums*

*Haynes Homogenizer Oil is specifically designed for the lubrication of Homogenizer Gears & Bearings in non-food contact application. This oil is water resistant, non-foaming, and heat resistant. Haynes Homogenizer Oil has a low pour point of 0°F and is a 50 weight oil.*

*Haynes Manufacturing Company 24142 Detroit Road Westlake, Ohio 44145  
U.S.A. & Canada: 1-800-992-2166 Phone: 440-871-2188 Fax: 440-871-0855  
<http://www.haynesmfg.com>*